
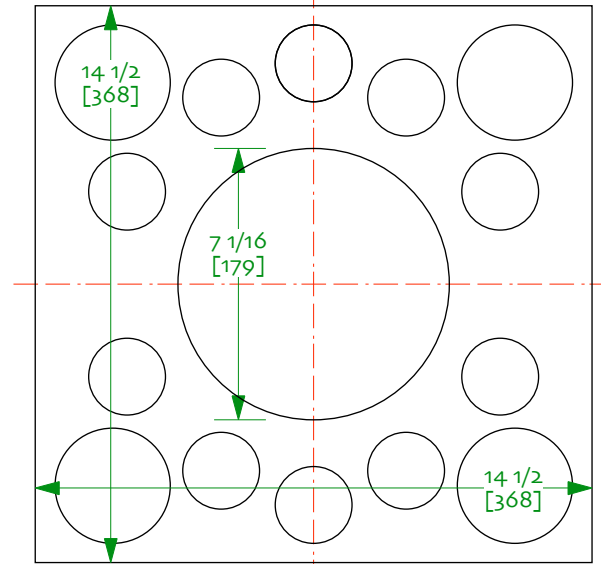
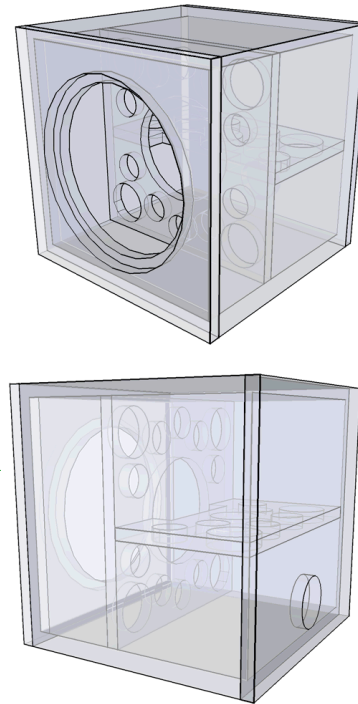
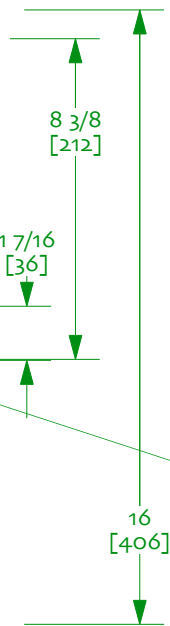


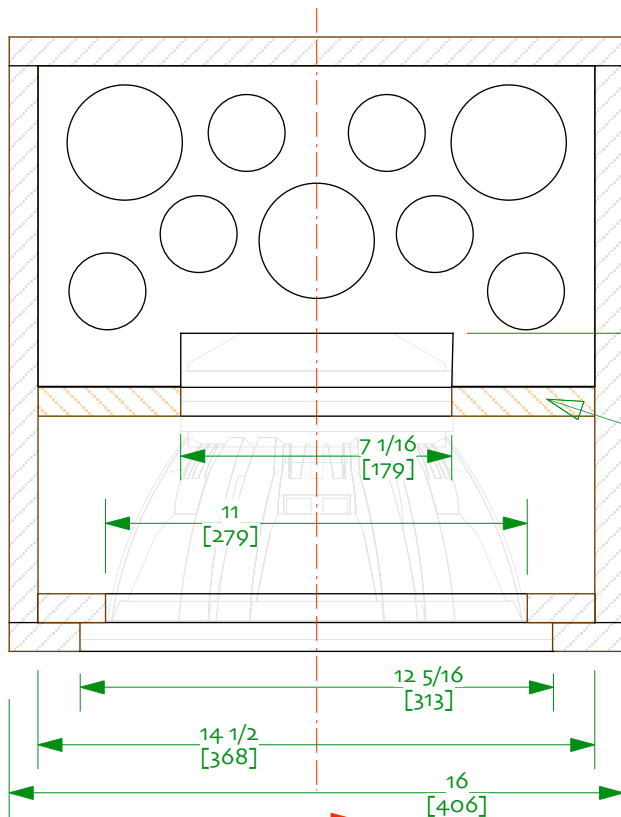

internal magnet brace

Notes:



0/ drawn with $\frac{3}{4}$ " (19mm) material

1/ magnet brace should fit tightly. The centre hole is critical, the smaller holes don't need to follow any pattern -- you just want to have lots of holes (irregular is probably better than regular). The back brace extends to meet the magnet brace & the magnet

2/ designed for external amplifier. If internal amplifier used increase the volume to accomodate volume of amplifier

3/ double front flush mounts driver

4/ damping material is optional, but recommended. Walls lined with fiberglass or a light fill of polyfluff

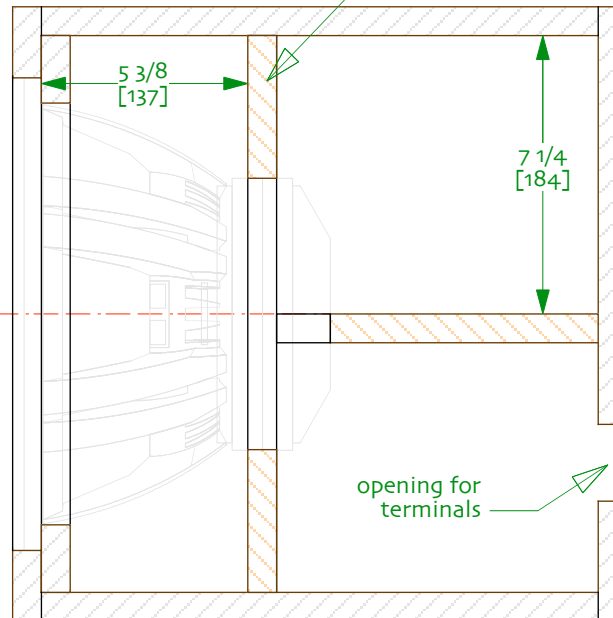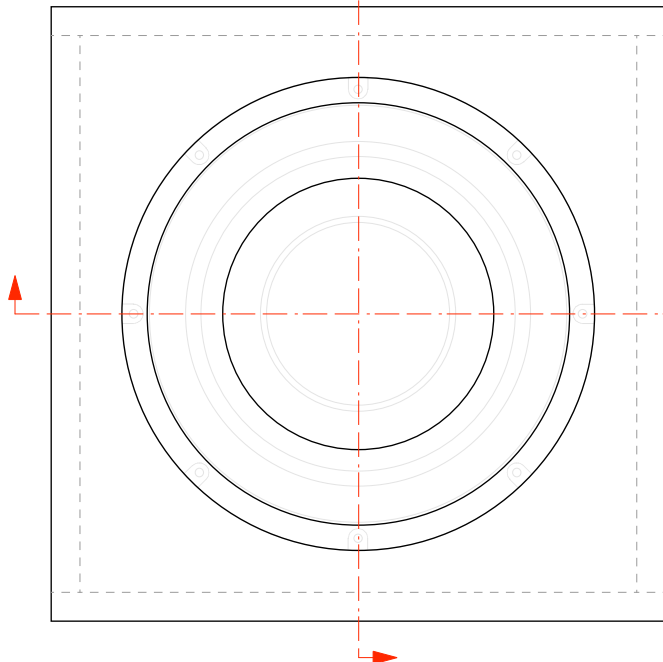

opening for terminals



SD12 SubDUCTION 16" Sealed Cube

13-march=06
drawn by did