

ALPAIR 5

Installation Guide




Copper Gold

Advanced design mini-driver with wide and highlighted frequency range.

Specifications

FO	125 HZ
REVC	4.0 OHM
SD	2.73K-MM ²
VAS	1.1 LITRES
MMS	1.53 G
BL	2.17TM
QMS	2.13
QES	1.08
QTS	0.716
LE-VC	55.17 UH
NO	0.18%
SPL	84.5 DB-1/M ²
X-MAX (1 WAY)	2.5MM
POWER	12W MAX, 6W RATED INPUT

— Frequency Response
— Impedance
- - 30 Degree Off Axis Response

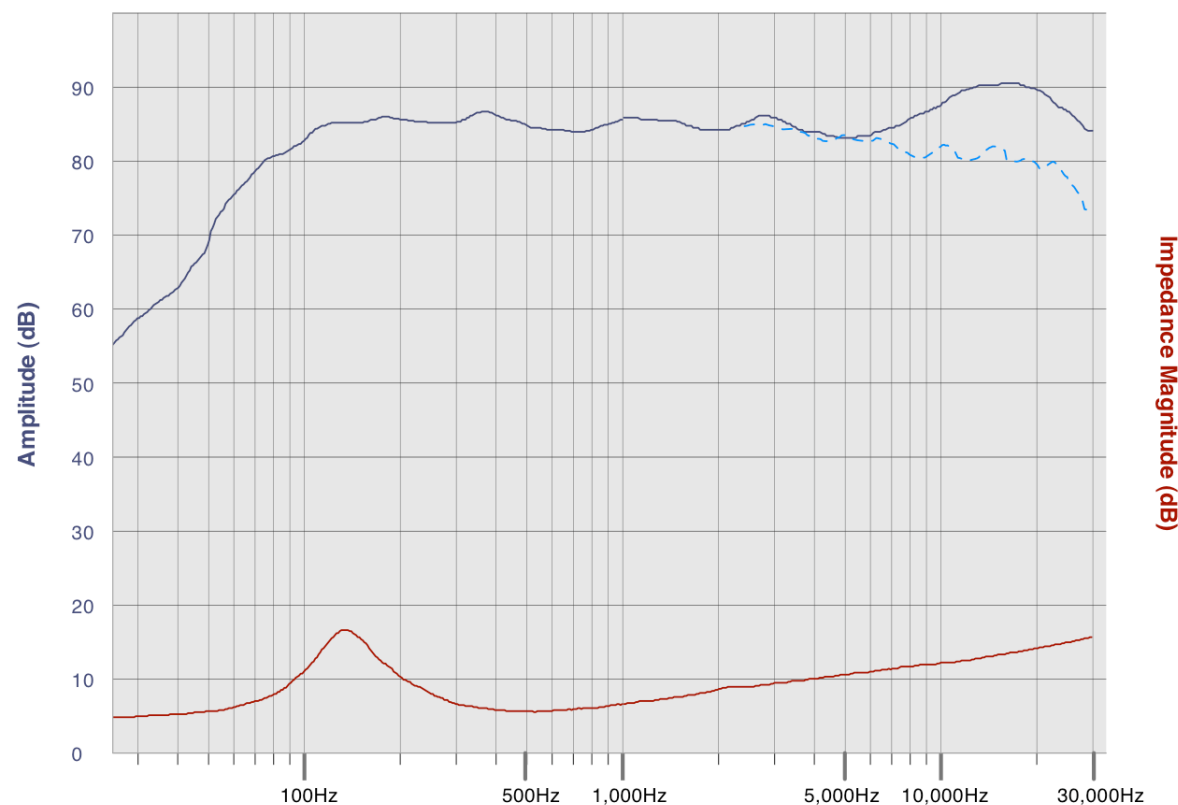

ALPAIR 5

Installation Guide



Copper Gold / Gunmetal Grey

Advanced design mini-driver with wide and highlighted frequency range.

